

# SN5453, SN7453 EXPANDABLE 4-WIDE AND-OR-INVERT GATES

SDLS114.

DECEMBER 1983—REVISED MARCH 1988


- Package Options Include Plastic and Ceramic DIPs and Ceramic Flat Packages
- Dependable Texas Instruments Quality and Reliability

### description

These devices are expandable 4-wide AND-OR-INVERT gates. They perform the Boolean function  $Y = AB + CD + EF + GH + X$  with  $X$  = output of SN5460/SN7460.

The SN5453 is characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN7453 is characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

### logic symbol<sup>†</sup>

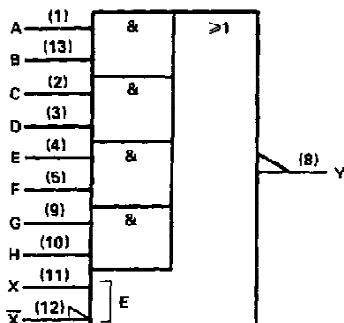


positive logic:  $Y = AB + CD + EF + GH + X$   
 $X$  = output of SN5460/SN7460

<sup>†</sup>This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.


Pin numbers shown are for J and N packages.

### logic diagram (positive logic)


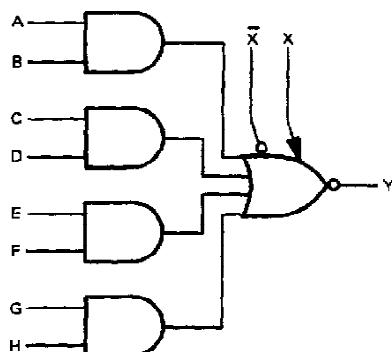


### schematic

**SN5453 . . . J PACKAGE**  
**SN7453 . . . N PACKAGE**  
(TOP VIEW)



**SN5453 . . . W PACKAGE**  
(TOP VIEW)

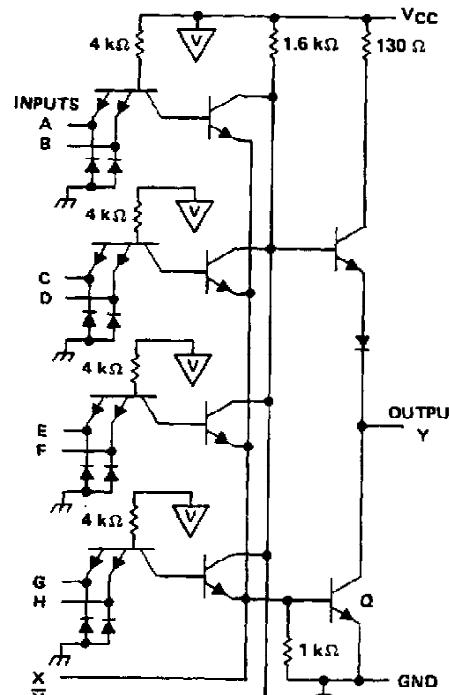

Resistor values shown are nominal.  
If expander is not used, leave X and X-bar open.

**PRODUCTION DATA** documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

## **SN5453, SN7453 EXPANDABLE 4-WIDE AND-OR INVERT GATES**

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)**

**NOTE 1:** Voltage values are with respect to network ground terminals.

**recommended operating conditions**

			SN5453			SN7453			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX			
V <sub>CC</sub> Supply voltage	4.5	5	5.5	4.75	5	5.25			V
V <sub>IH</sub> High-level input voltage		2			2				V
V <sub>IL</sub> Low-level input voltage			0.8			0.8			V
I <sub>OH</sub> High-level output current			-0.4			-0.4			mA
I <sub>OL</sub> Low-level output current			16			16			mA
T <sub>A</sub> Operating free-air temperature	-55	125	0	0	70	0			°C

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

PARAMETER	TEST CONDITIONS <sup>†</sup>	SN5453			SN7453			UNIT
		MIN	TYP <sup>‡</sup>	MAX	MIN	TYP <sup>‡</sup>	MAX	
V <sub>IK</sub>	V <sub>CC</sub> = MIN, I <sub>I</sub> = -12 mA			-1.5			-1.5	V
V <sub>OH</sub>	V <sub>CC</sub> = MIN, V <sub>IIL</sub> = 0.8 V, I <sub>OIH</sub> = -0.4 mA	2.4	3.4		2.4	3.4		V
V <sub>OOL</sub>	V <sub>CC</sub> = MIN, V <sub>IIH</sub> = 2 V, I <sub>OOL</sub> = 16 mA		0.2	0.4		0.2	0.4	V
I <sub>I</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 5.5 V			1			1	mA
I <sub>IH</sub>	V <sub>CC</sub> = MAX, V <sub>IH</sub> = 2.4 V			40			40	μA
I <sub>IIL</sub>	V <sub>CC</sub> = MAX, V <sub>IIL</sub> = 0.4 V			-1.6			-1.6	mA
I <sub>OSS</sub> <sup>§</sup>	V <sub>CC</sub> = MAX	-20		-55	-18		-55	mA
I <sub>ICCH</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 0 V		4	8		4	8	mA
I <sub>ICCL</sub>	V <sub>CC</sub> = MAX, See Note 2		5.1	9.5		5.1	9.5	mA
I <sub>X</sub> <sup>¶</sup>	V <sub>XX</sub> = 0.4 V, I <sub>OOL</sub> = 16 mA			-2.9			-3.1	mA
V <sub>BE(Q)</sub> <sup>†</sup>	I <sub>X</sub> +I <sub>X</sub> ' = 0.41 mA, R <sub>XX</sub> = 0, I <sub>OOL</sub> = 16 mA			1.1				V
	I <sub>X</sub> +I <sub>X</sub> ' = 0.62 mA, R <sub>XX</sub> = 0, I <sub>OOL</sub> = 16 mA						1	
V <sub>OH</sub> <sup>¶</sup>	I <sub>X</sub> = -0.15 mA, I <sub>X</sub> ' = -0.15 mA, I <sub>OIH</sub> = -0.4 mA	2.4	3.4					V
	I <sub>X</sub> = -0.27 mA, I <sub>X</sub> ' = -0.27 mA, I <sub>OIH</sub> = -0.4 mA			2.4	3.4			
V <sub>OOL</sub> <sup>¶</sup>	I <sub>X</sub> +I <sub>X</sub> ' = 0.3 mA, R <sub>XX</sub> = 138 Ω, I <sub>OOL</sub> = 16 mA		0.2	0.4				V
	I <sub>X</sub> +I <sub>X</sub> ' = 0.43 mA, R <sub>XX</sub> = 130 Ω, I <sub>OOL</sub> = 16 mA				0.2	0.4		

<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

\* All typical values are at  $V_{CC} = 5$  V,  $T_A = 25^\circ\text{C}$ .

<sup>5</sup> Not more than one output should be shorted at a time.

Using expander inputs,  $V_{CC} = \text{MIN.}$ ,  $T_A = \text{MIN.}$ , except typical values.

**NOTE 2:** All inputs of one AND gate at 4.5 V, all others at GND.

switching characteristics,  $V_{CC} = 5$  V,  $T_A = 25^\circ\text{C}$  (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{PLH}$	Any	Y	$R_L = 400 \Omega$ , $C_L = 15 \text{ pF}$ #	13	22	ns	
$t_{PHL}$				8	15	ns	

# Expander pins open.

**NOTE 3:** Load circuits and voltage waveforms are shown in Section 1.